



1

- Pull up your FinestraMiner hotspot.
- Click on the “gear” icon.

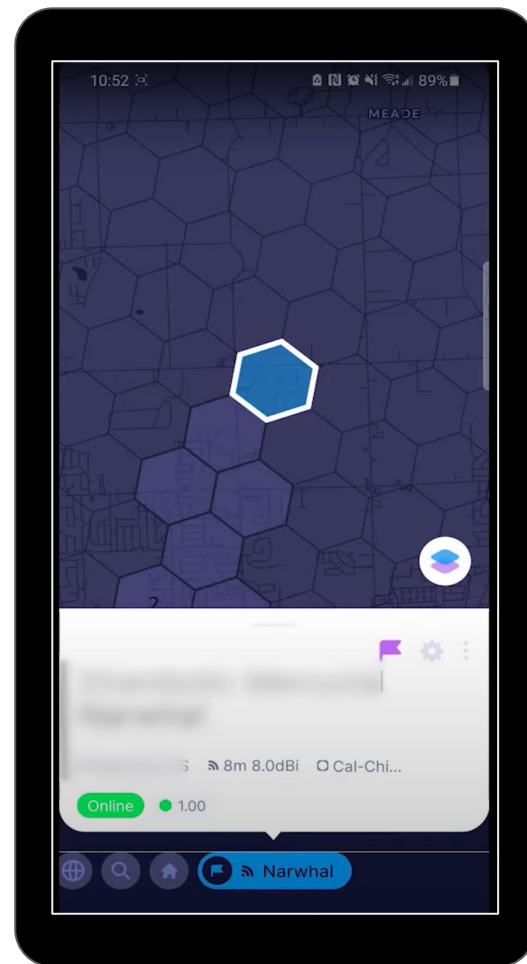


2

- Once the Hotspot settings load, click on “Update Hotspot.”

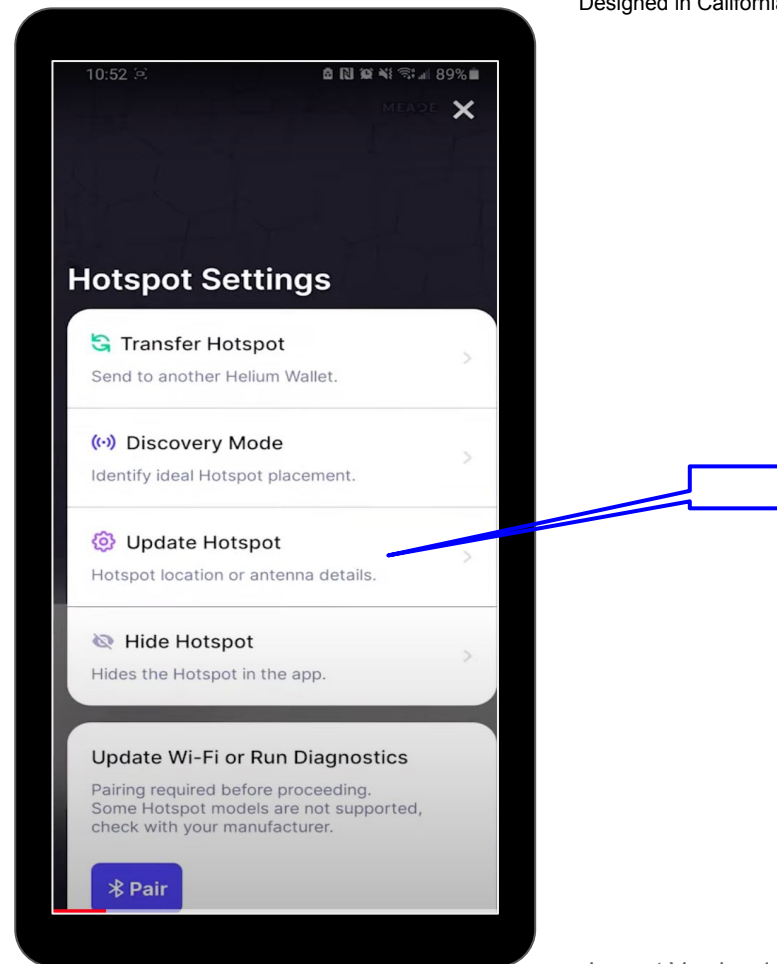


3

- From the dropdown menu, tap “Select Antenna” to pull up a list of antennas.

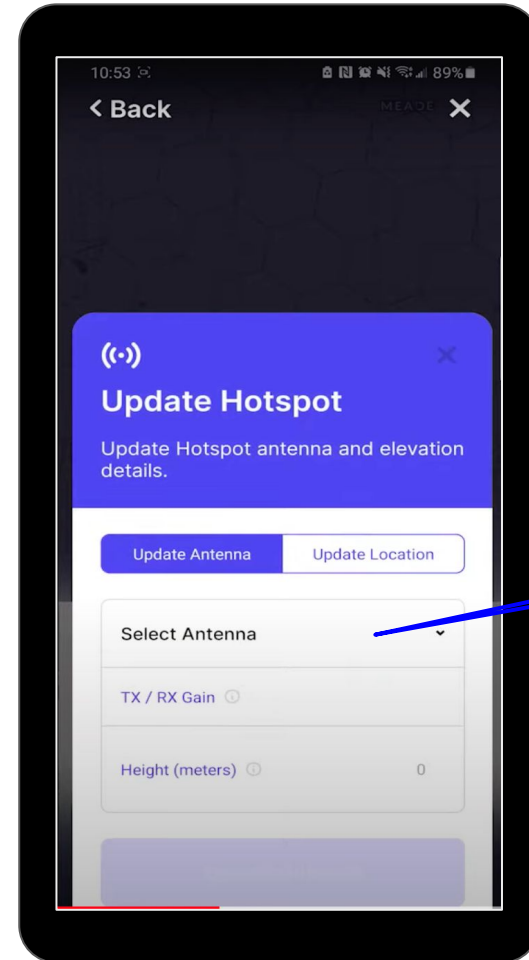


4

- Select “Custom Antenna”.

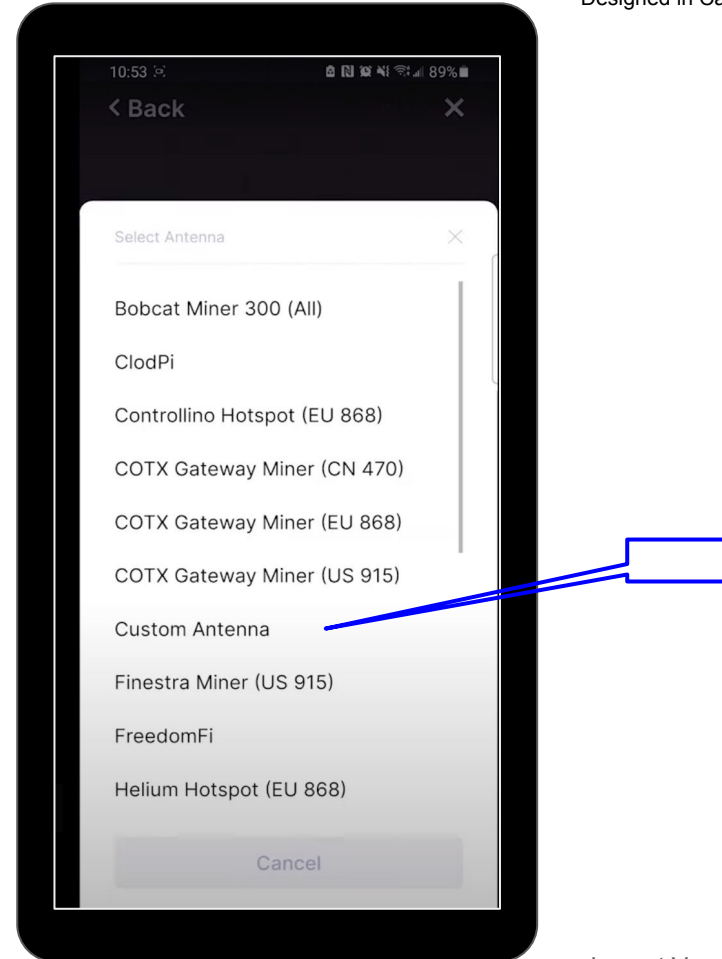


5

- Set the “TX / RX Gain” to “2.6 dBi”.
- Make sure to update the placement height of your FinestraMiner (in meters).
- Then tap “Update Antenna”.

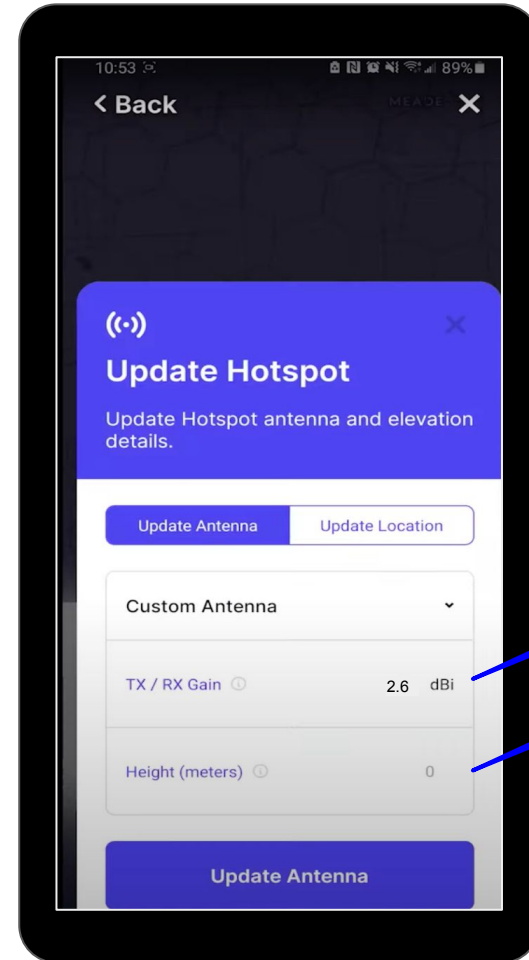

6

- You will have to pay a fee of 55,000 DC (55 cents) to submit this change.
- It will then put your miner in a pending status. It will eventually fully update anywhere from after a couple of minutes, to up to a couple of hours.

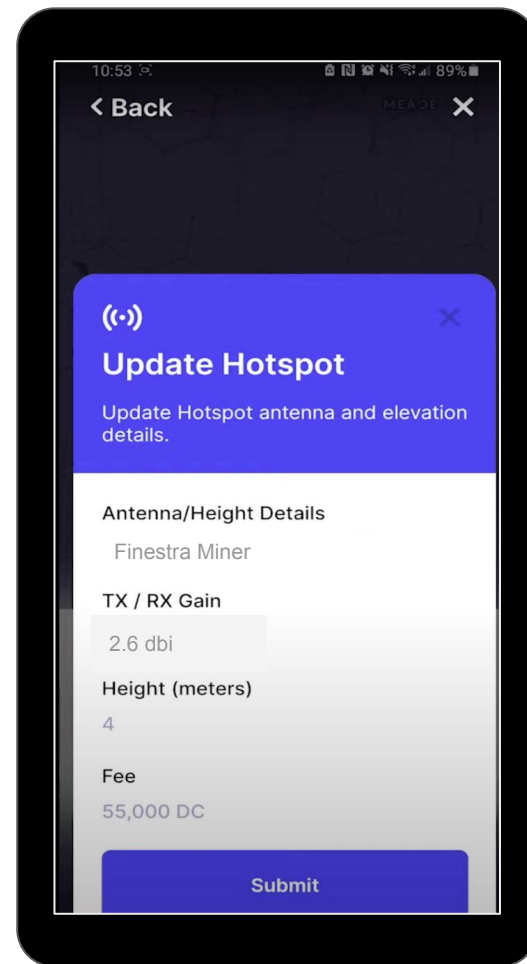



Contact

<https://mimiQ.io/contact-us/>